

ACCESSORIES

FOR AUTOMATIC LUBRICATOR



ACCESSORIES

- Progressive Distribution Blocks - 2,3,4,6,8,12 Port
- Battery Packs
- Brackets / Clamps
- Adaptors – Standard & Metric
- Remote Power/Control / DC Power Options
- Mounting Plates
- Weatherproof Caps (Optional)
- Nylon Hose
- Oil Brush

NEW PRODUCTS



Open Gear Sponge Pinion Applicator



T T Thermalube Soft Grease

www.atselectrolube.com



ABOUT US

A.T.S. ELECTRO-LUBE™ INTERNATIONAL INC. has been manufacturing and selling ELECTRO-LUBER™ Automatic Electronic Lube Dispensers worldwide for over 30 years. The product was invented and designed by our founder, and is manufactured in British Columbia, Canada.

With market trends changing, the company introduced a new line of motorized lubricators for the industrial market. The ULTIMATE LUBER™ series provides single and multi-point lubrication using progressive distribution blocks. These units are the most powerful self-contained lubricators in the world.

The TITAN CL LUBER™ was then introduced, which incorporates the proven pump and electronics of our ULTIMATE series while using industry standard grease cartridges for ease of refilling. The dual cartridge TITAN II motor-driven lubricant dispenser followed.

The latest additions to our product line of lubricators are the powerful TITAN OILER and the JACK-LUBER™. We also offer a variety of accessories to complement our products.

ATS is committed to improving and developing products to satisfy the growing needs of industries for decades to come. We will continue to adapt to market demands and expand our product line with the same dedication to quality as we always have. You can depend on ATS to sell only top-of-the-line, versatile, automatic lubrication equipment for your every application.



OVER 30 YEARS OF MANUFACTURING RELIABLE LUBRICATION PRODUCTS FOR AN INDUSTRIAL WORLD

TYPICAL INDUSTRIES AND APPLICATIONS

- | | |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------|
| Mining/Minerals | Stacker Cranes
Crushers/Grinders/Shakers
Bucket Elevators
Conveyors
Slurry Pumps |
| Manufacturing | Bridge Cranes
Conveyors
Hoists
Heat Treat furnaces
Chain Lubricators
Robots |
| Food and Beverage | Packaging Lines
Mixers
Washers, Dryers
Can/Bottling Lines
Ovens |
| Building Maintenance | Elevators/Escalators
Motors
HVAC
Air Handlers/Filters
Waste Water Treatment
Potable Water Plants |
| Municipal | Incinerators
Rolling Mills
Material Handling
Cooling Pumps
Furnace Trunions and Fans |
| Metals | Lumber Mills
Paper and Fiberboard Mfg.
Slurry Pumps
Dryers |
| Pulp and Paper | Flour Mills
Grain Mills
Feed Mills |
| Agriculture | Coal Handling Equipment
Drills, Pumps
Refinery Operations
Wind Turbines |
| Energy | |

Distributed By:



Email: info@atselectrolube.com




www.atselectrolube.com

7388 Wilson Avenue, Delta, BC Canada V4G 1H3



ATS ELECTRO-LUBE
INTERNATIONAL INCORPORATED

THE MOST
POWERFUL
SELF-CONTAINED
LUBRICATORS
IN THE WORLD

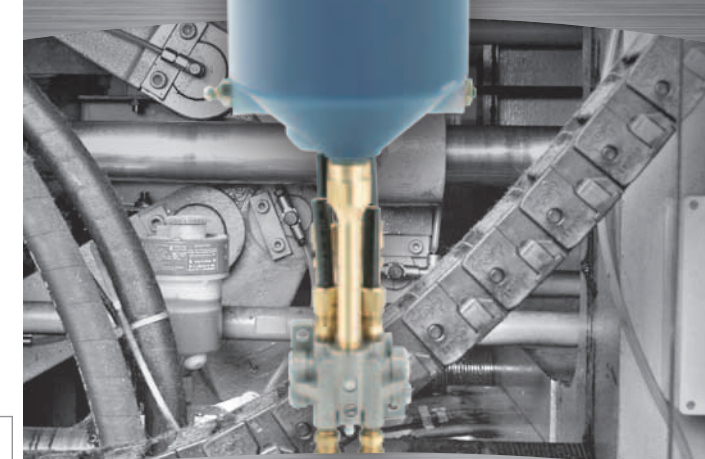

www.atselectrolube.com

TOLL FREE PHONE: 1-800-663-8141

ELECTRO-LUBER SERIES

GAS-DRIVEN LUBRICANT DISPENSER – 50 PSI

JACK SERIES

MOTOR-DRIVEN JACKSCREW LUBRICANT DISPENSER – 200 PSI

ULTIMATE SERIES

MOTOR-DRIVEN LUBRICANT DISPENSER – 1000 PSI

TITAN SERIES

MOTOR-DRIVEN LUBRICANT DISPENSER – 1000 PSI

Remote Control Options available for all series



16 oz/ 475cc 8 oz/ 250cc 4 oz/ 125cc 2 oz/ 60cc




Jack 125 Luber & Replacement Cartridge
Jack 250 Luber & Replacement Cartridge





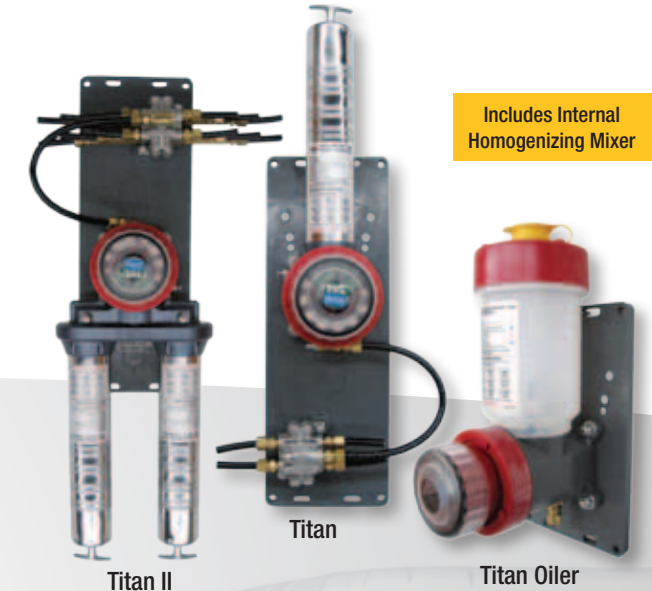


17 oz/ 500cc 8 oz/ 250cc 4 oz/ 125cc

Includes Internal Homogenizing Mixer



Titan II Titan Titan Oiler

Includes Internal Homogenizing Mixer

COMPARE AT A GLANCE	ELECTRO-LUBER SERIES	JACK SERIES	ULTIMATE SERIES	TITAN SERIES
APPLICATION	Single Point	Single and Multi-Point (up to 12 points)	Single and Multi-point (up to 12 points)	Single and Multi-point (up to 12 points)
SIZES	Available in 2, 4, 8, or 16 oz. capacity (60, 125, 250 or 475cc)	Available in 4 oz. capacity (125cc) & 8 oz. (250cc) capacity	Available in 4, 8, or 17 oz. capacity (125, 250 or 500cc)	Requires 1 or 2 - 14oz. grease cartridge. Oiler has 47 oz. capacity
TECHNOLOGY	Safe, Inert Nitrogen gas powered	Jackscrew mechanism	Powerful mechanical fixed-displacement pump	Powerful mechanical fixed-displacement pump. Proven Ultimate Series technology
DISPENSING POWER	Up to 50 psi. Single Point can be remote mounted to 3 ft.	200 psi. Single Point can be remote mounted up to 20ft. Multi-Point can be remote mounted up to 10ft. Distribution blocks available.	Over 1000 psi. Single Point can be remote mounted up to 35 ft. Multi-Point can be remote mounted up to 20ft. Distribution blocks available.	Over 1000 psi. Single Point can be remote mounted up to 35 ft. Multi-Point can be remote mounted up to 20 ft. Oiler up to 200 ft. or multi-point up to 60ft. Distribution blocks available.
POWER SOURCE	AA Alkaline Batteries	Battery pack or remote AC/DC power	Battery pack or remote AC/DC power Optional lithium battery pack	Battery pack or remote AC/DC power Optional lithium battery pack
CYCLE	Single use, Disposable	Reusable motor drive unit and easily replaceable single-use cartridge	Refillable with standard grease gun or pump	Refillable with standard grease cartridge(s). Oiler refillable through screened port
LUBE CHOICE	Customer specified lube	Customer specified lube. Replaceable cartridge	Customer Fill/Refill as needed	Customer replaced cartridge or oiler refilled as needed
OPERATING SPAN	15 days to 1 year on factory filled unit	Variable from 15 days to 2 years	Variable from 15 days to 2 years	Variable from 15 days to 2 years
LED INDICATORS	Red LED - Positive verification unit is working	Tri-color LEDs indicate normal operation, low battery	Tri-color LEDs to indicate normal operation, low battery, low temp.	Tri-color LEDs indicate normal operation, low battery, low lube level, low temp. Oiler has low lube indicator.
WEATHERPROOF	Waterproof (Submerged) to 30 ft Temp range -40°F to 131°F (-40°C to 55°C) Weathercap available	Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C). Use special lithium battery pack for colder/hotter temperatures. Weathercap included	Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C) Weathercap included	Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C) Weathercap included for cartridge and motor housing.
DISPENSING RATE	Established constant flowrates, simply select and install	Standard timed intervals or custom programming available	Standard timed intervals or custom programming available	Standard timed intervals or custom programming available
APPROVALS	UL & Cul approved Intrinsically Safe for all areas; MSHA, Energy Mines Canada IECEX BAS 11.0121x & 11.0120x 	Class I, Groups A, B, C, D. Div 2 Class II, Div 2, Groups F & G  T-Code T6 55°C Class III hazardous locations  PATENTED	Class I, Groups A, B, C, D. Div 2 Class II, Div 2, Groups F & G Class III hazardous locations  T-Code T6 55°C PATENTED	Class I, Groups A, B, C, D. Div 2 Class II, Div 2, Groups F & G Class III hazardous locations  T-Code T6 55°C PATENTED

TOLL FREE PHONE: 1-800-663-8141

TOLL FREE FAX: 1-800-663-8140

BUS: (604) 946-1308 FAX: (604) 946-0427

www.atselectrolube.com